


HydroGuard™ HT115

High Temperature Shut-Off Device

Added Safety

High Temperature Protection

Easy to Install

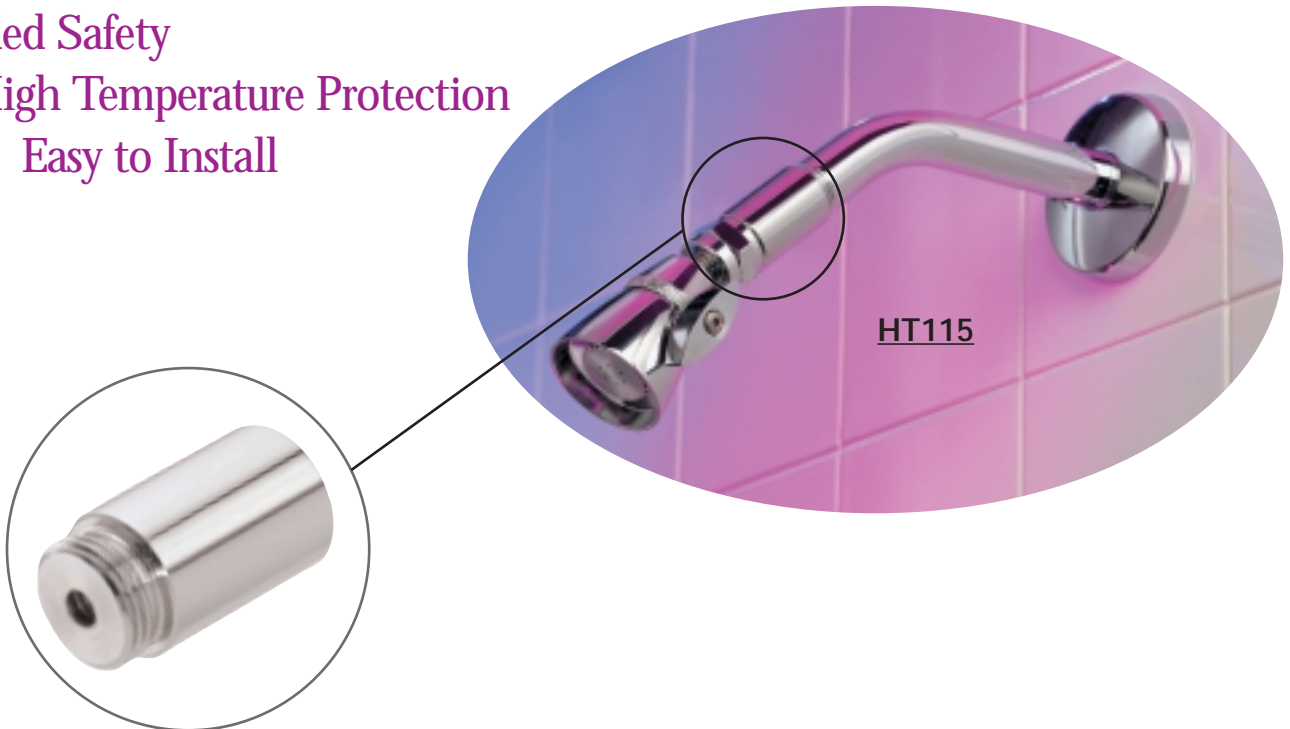

Powers' new high temperature shut-off device is designed to provide thermostatic protection for the shower. If the temperature during the shower reaches 115°F (46°C) this device instantly reduces the flow to less than 0.25 gpm (from 2.5 gpm). Once the temperature drops below 115°F (46°C) the HT115 automatically resets and resumes the full flow within seconds. It is ideal for use with two handle, single handle, pressure balance and temperature control valves. It is easy to install and can be used for new or existing application.

- Factory set at 115°F (46°C) shut-off limit for safety
- New ATA (Advanced Thermal Actuation) technology improves performance
- Solid brass construction enhances durability
- Maximum flow rate 4.0 gpm (15.2 l/min)

Superior design ensures long-term reliability and it is ideal for:

- Hospitals
- Hotels/Motels
- Private Residences
- Healthcare
- Schools
- Anywhere shower safety is a concern

ASSE 1062
and CSA
compliant

POWERS



A WATTS INDUSTRIES CO.

Product Specification - High Temperature Shut-Off Device

Specification HT115

- Description Shower high temperature shut-off device
- Finish Polished Chrome
- Housing Material Brass
- Agency/Spec Compliance ASSE 1062, CSA
- Maximum Flow 4.0 gpm (15.2 l/min)
- Temperature Activation 115°F [46° C]
- Shipping Weight 0.25 lb. [0.11 kg]

Dimension

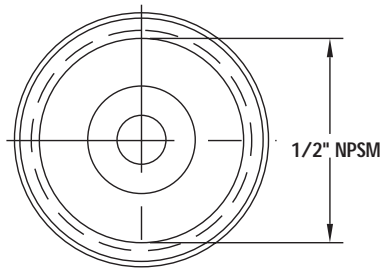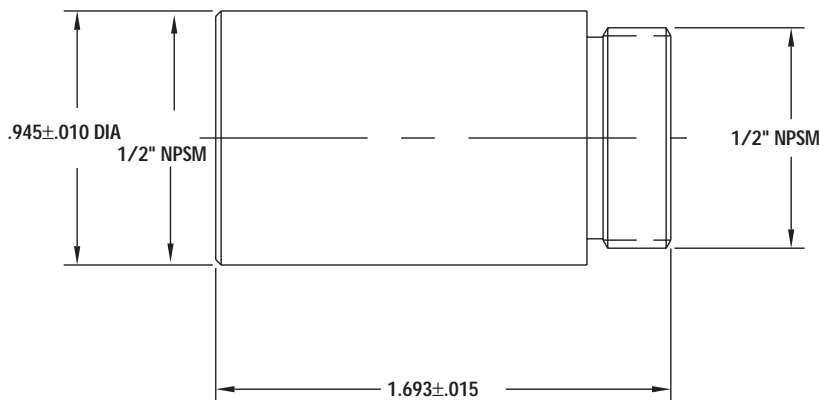

ENGINEERING APPROVAL

Project: _____

Contractor: _____

Architect/Engineer: _____