

POWERS

A WATTS INDUSTRIES CO.

PRODUCT SPECIFICATION

HYDROPANEL™ II SHOWER SYSTEM

with Hydroguard 410 Pressure Balancing Valve

PRODUCT DESCRIPTION

The Powers Hydropanel II Series 450-0410 Shower System combines pressure balanced water control with the convenience of modular shrouding. Hydropanel II stainless steel shrouding provides a concealed shower system where in-wall piping does not exist or may not be practical. The single unit shower mounts easily onto preassembled copper tubing with just three screws.

Behind the shroud, a Hydroguard 410 valve uses a proven pop-pet/diaphragm cartridge to balance hot and cold water supply flows. This sensitive diaphragm responds immediately to supply pressure changes to maintain the user adjusted bathing temperature. If either supply pressure fails, the valve virtually shuts off.

Hydropanel II units can be used for new or retrofit applications, such as single showers or for complete shower rooms. They are ideal in schools, health clubs, factories, and remodeled older buildings. Optional hand-held showers mounted on vertical glide rails provide easy shower access for users with limited mobility. Optional Hydropanel II Modular Shrouding provides easy to install, interlocking stainless steel panels to conceal all exposed room piping.

FEATURES

- Installation requires minimal hardware: mount the brackets, connect supply piping and hang shrouding.
- All exposed surfaces are easy to clean brushed stainless steel or chrome plated for easy maintenance.
- Single handle control and color coded dial offer quick and easy temperature selection.
- Concealed handle rotation stop guards against scalding due to over adjustment of the handle.
- The Celcon® balancing cartridge provides maximum protection against lime and dirt buildup.
- Fixed (vandal resistant) and adjustable swivel showerheads are available.
- Chrome plated tri-handles and ADA compliant chrome plated lever handles are available.
- Optional hand-held showers with flexible hoses mount on 18" glide rails for use in special applications.
- Optional Modular Shrouding offers convenient configuration of horizontal and vertical panels to cover all exposed shower room piping. See Form #PS450SH for details on Hydropanel II Modular Shrouding.
- All Hydropanel II units with Hydroguard 410 valves include a one year limited warranty.
- Hydroguard 410 valves meet the requirements of ANSI 112.18M, ASSE 1016, and CSA B125 standards.



Hydropanel II Model 450-0412 with Swivel Showerhead and Soapdish (available with ADA complaint lever handle, Model 450-0418).



Hydropanel II Model 450-0414 with Handshower Assembly and Soapdish (available with ADA complaint lever handle Model 450-0420).

SPECIFICATIONS

Hydropanel: Brushed 18 Gauge 304 SS. Dimensions 31 1/8"H x 7 1/2"W x 6 1/2"D [791mm H x 191mm W x 165mm D].

Piping: 1/2" copper tubing.

Showerhead: *Fixed:* Chrome plated brass, maximum flow 2.5 gpm @ 80 psi [.16 l/s @ 552 kPa]. *Adjustable Swivel (shown):* Chrome plated brass, 30° angle of rotation, maximum flow 2.5 gpm @ 80 psi [.16 l/s @ 552 kPa].

Valve Assembly and Trim: Hydroguard 410 Pressure Balancing Valve. Three port, heavy cast bronze body with brass stem. Standard in line checkstops. Standard handle rotation stop. Chrome plated zinc tri-handle, or ADA compliant lever handle.

Connections: 1/2" NPT inlets /outlet.

Valve Operation: 6 gpm @ 45 psi differential [.38 l/s @ 310 kPa]. Maximum pressure 125 psig [862 kPa]. Maximum inlet temperature 180°F [82°C].


Handshower: Full spray with pushbutton water control. Minimum flow 2.0 gpm @ 20 psi [.13 l/s @ 138 kPa]. Maximum flow 2.5 gpm @ 80 psi [.16 l/s @ 138 kPa]. 60" [1499mm] reinforced vinyl hose with 1/2" chrome plated supply connections. 18" [457mm] chrome plated brass glide bar, self-tensioned for easy height adjustment.

GENERAL INSTALLATION

The recommended minimum distance between the centerline of two Hydropanel II units is 36 inches [914mm]. Position units evenly between inlet supply piping.

Suggested showerhead heights (if not shown in architectural plans for shower room) are:

Men - 77" [1956mm] **Youth** - 66" [1676mm]
Women - 70" [1778mm] **Youth** - 60" [1524mm]

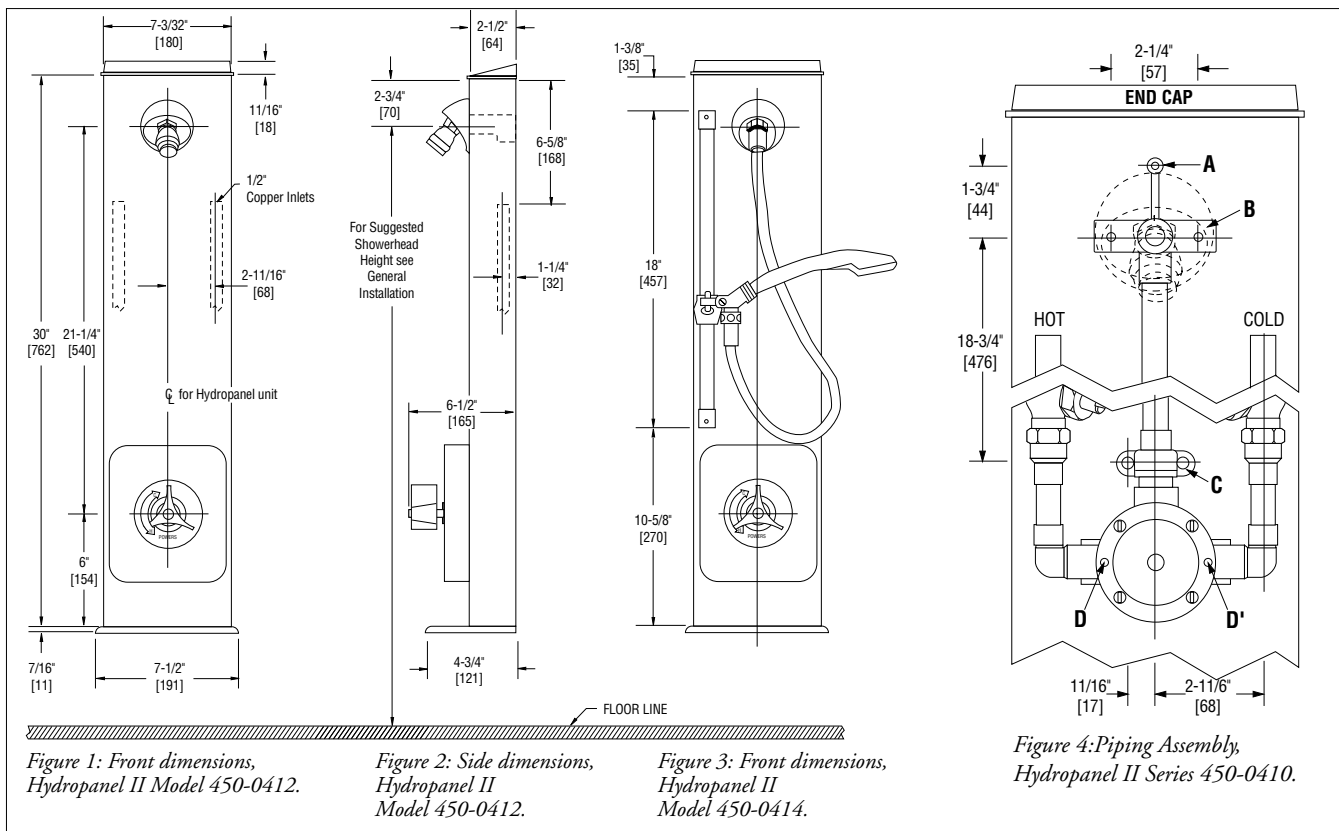

ENGINEERING APPROVAL

Project: _____
 Contractor: _____
 Architect/Engineer: _____

ORDERING INFORMATION

Hydropanel II with Hydroguard 410 Pressure Balancing Valve

with Tri-Metal Handle Order Code

- Hydropanel II with Fixed Showerhead and Soap Dish **450-0410**
- Hydropanel II with Fixed Showerhead, less Soap Dish **450-0411**
- Hydropanel II with Swivel Showerhead and Soap Dish **450-0412**
- Hydropanel II with Swivel Showerhead, less Soap Dish **450-0413**
- Hydropanel II with Hand Shower and Soap Dish **450-0414**
- Hydropanel II with Hand Shower, less Soap Dish **450-0415**

with Metal Lever Handle

- Hydropanel II with Fixed Showerhead and Soap Dish **450-0416**
- Hydropanel II with Fixed Showerhead, less Soap Dish **450-0417**
- Hydropanel II with Swivel Showerhead and Soap Dish **450-0418**
- Hydropanel II with Swivel Showerhead, less Soap Dish **450-0419**
- Hydropanel II with Hand Shower and Soap Dish **450-0420**
- Hydropanel II with Hand Shower, less Soap Dish **450-0421**

POWERS
 A WATTS INDUSTRIES CO.

© Feb. 2002 Powers, a Watts Industries Co.
 USA Phone: 800.669.5430
 www.powerscontrols.com
 Canada Phone: 888.208.8927